

PC12030HP | DATASHEET

Pericentric lensfor 1/2" sensors





SPECIFICATIONS

Optical specifications

Image circle	(mm)	4.8
Min sensor size		1/2"
Working distance with minimum object size ¹	(mm)	80
Working distance with maximum object size ¹	(mm)	20
Viewing angle	(°)	24
f/N		1.4 - close

Mechanical specifications

Mount	С
Length ²	(mm) 451.5
Front Diameter	(mm) 157.0
Mass	(g) 6667

- 1 Working distance: distance between the front end of the mechanics and the object.
- ² Measured from the front end of the mechanics to the camera flange.

KEY ADVANTAGES

Just one camera

No need for multiple cameras placed around and over the object.

Fast image analysis

No image matching software is needed as the picture is not segmented.

Single point of view

No perspective effects typical of multi-image systems.

Smooth on-line integration

Inspected parts pass unobstructed in the free space below the lens.

PC pericentric lenses are unique optics designed to perform complete inspection of objects up to 60 mm in diameter, quickly and reliably.

FIELD OF VIEW

Field of view (diameter x height)

Minimum	(mm x mm)	20.0 x 60.0
Maximum	(mm x mm)	60.0 x 20.0


COMPATIBLE PRODUCTS

Full list of compatible products available here.



A wide selection of innovative machine vision components.



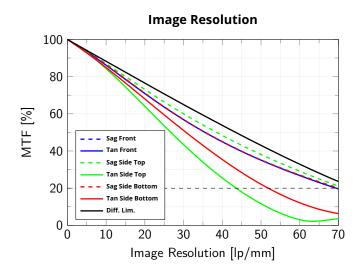

Modulation Transfer Function (MTF) vs. Image Resolution, wavelength range 486 nm - 656 nm of cylindrical object of diameter 30 mm and height of 20 mm

PC IMAGING SETUP

The image of the top of the object and its sides are inscribed into the short side of the camera detector.

The smaller the object diameter, the larger the object height which can be inspected, while short objects can be inspected over a larger diameter.

