

FTBP525TC | DATASHEET

Optical filter, band pass, green



KEY ADVANTAGES

- High and precise transmission
- Wide range selection
- Available for fixed focal length lenses and telecentric lenses
- Increase resolution
- Block unwanted light
- Tolerate high temperature environment

Light filtering is a typical need in machine vision applications. Together with LED illuminators, filters can improve image contrast by blocking unwanted light and increase the accuracy and repeatability of the vision system.

SPECIFICATIONS

Optical specifications

| | | |
|-------------------------------|-----------|-----------|
| Type | band pass | |
| Light color | green | |
| Wavelength range ¹ | (nm) | 500 - 550 |
| Cut-on 50% transmission | (nm) | - |
| Cut-off 50% transmission | (nm) | - |
| FWHM ² | (nm) | 50 |

Mechanical specifications

| | | |
|-----------------|-----------|------|
| Filter Thread | TC insert | |
| Outer Diametere | (mm) | 24.5 |
| Clear Aperture | (mm) | 15.0 |


¹ Peak transmission >90%

² Tolerance ±10 nm

ADDITIONAL NOTE

Except TC23004, TC23007, TC23009, TC23012 and all TC13xxx lenses for 1/3" sensor. Before purchasing a TC filter, please check its mechanical compatibility with the selected lens. Using the filter may cause some vignetting, depending on the size of the sensor.

Transmission Spectrum

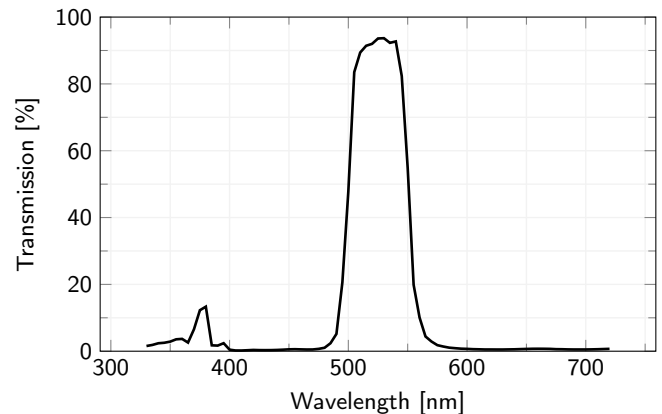

COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.